

RUBBER BELT AIRLESS BLAST MILLS

When high production and superior cleaning are at the top of your priorities list, Viking's Rubber Belt Blasters are the clear choice. Available in standard 1.5, 3, 6, 12, 16 and 20 cubic foot capacities, with custom sizing also available to fit specific applications. These machines are ideal for high speed processing of parts that can be gently tumbled in the blast mill's cushioned rubber cavity.

STANDARD FEATURES:

- "Viking Guard" belt braking system stops belt rotation in the event of a jam to keep parts from tearing the belt
- Utilizes VK PowerMax high velocity, center-fed blast wheels
- Pneumatic blast cabinet door (Models 600 and 1200 only)
- 5-30, HP blast wheel configurations
- Fully adjustable lip type airwash separator ensures optimal abrasive cleaning

OPTIONAL FEATURES:

- Dust collection system
- Rotary scalp drum for separating slag, flashing and other large contaminants
- CSA approved UL recognized components
- Auxiliary abrasive hopper and low level sensor



- Take away conveyors
- Loader for loading the blast mill from a floor loaded tote
- · Cast chrome drum heads
- Splice belt available for quick change belt replacement for reduced maintenance and down time


CALL 1-800-835-1096



RUBBER BELT AIRLESS BLAST MILLS

| SPECIFICATIONS | 100 | 300 | 600 | 1200 | 1500 | 2400 |
|-------------------------|-----------------|-----------------|-----------------|-----------------|----------------|-----------------|
| Approx. Capacity | 1.5 Cu. Ft. | 3.0 Cu. Ft. | 6.0 Cu. Ft. | 12.0 Cu. Ft. | 15.0 Cu. Ft. | 24.0 Cu. Ft. |
| Maximum Load Weight | 300 lbs. | 400 lbs. | 1,000 lbs. | 1,600 lbs. | 1,950 lbs. | 2,300 lbs. |
| Blast Cavity Dimensions | 20"W x 20" Dia. | 30"W x 24" Dia. | 37"W x 27" Dia. | 42"W x 36" Dia. | 49"Wx 43" Dia. | 58"W x 49" Dia. |
| Blast Wheel Horsepower | 3 HP | 10 HP | 15 HP | 25 HP | 30 HP | 2 @ 20HP |
| Electrical | 460V, 3Ø | 460V, 3Ø | 460V, 3Ø | 460V, 3Ø | 460V, 3Ø | 460V, 3Ø |
| Abrasive Required | 300 lbs. | 450 lbs. | 650 lbs. | 850 lbs. | 1,100 lbs. | 1,400 lbs. |
| Lip Type Seperator | 15" | 15" | 20" | 20" | 30" | 30" |
| Shipping Weight | 4,350 lbs. | 5,700 lbs | 7,050 lbs. | 9,500 lbs. | 13,000 lbs. | 16,500 |

It is in the customization of our basic designs to your parts specific needs that truly sets Viking apart from the competition. With an accomplished and proven design staff, Viking can build equipment from the ground up or simply modify existing models to tailor fit your cleaning application. At Viking we do not simply match your part to the closest machine size that will work. We match our blast equipment to your part, to provide the most efficient and economical cleaning solution possible.

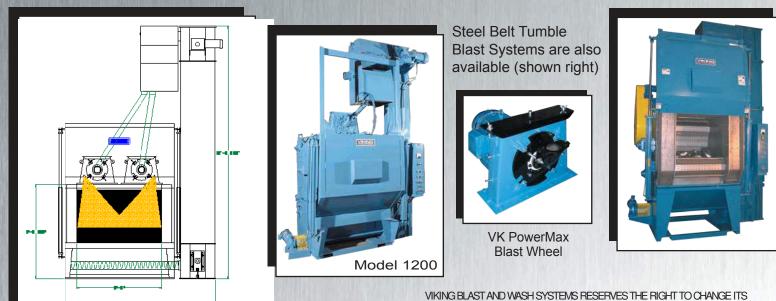

VIKING OFFERS A FULL LINE OF AIRLESS SHOT BLAST & PARTS WASH EQUIPMENT



PRODUCTS OR SPECIFICATIONS AT ANY TIME WITHOUT NOTICE OR OBLIGATION. All machines are equipped with guards and safety devices to comply with State and Trade Regulations for the protection of operators. All electrical wiring is designed to conform with the protection of operators. Viking Blast and Wash Systems, or any of its divisions will not assume responsibility in cases of failure by the operator to exercise reasonable care when using the equipment.



VIKING BLAST & WASH SYSTEMS 731 S. Industrial CT, Rose Hill, KS 67133 Phone: 316-634-6699 Fax: 316-634-6658 Toll Free: 800-835-1096 Email: sales@vikingcorporation.com Web: www.vikingcorporation.com